



## Features

- RGB+White color mixing capability
- 3-in-1 RGB LEDs with separate 3000K LEDs
- Excellent color rendering of 90+ CRI
- Up to 350 lumens per foot performance
- Consumes up to 7 watts per foot
- Cuttable every 2.46" (62.5mm)
- 16.4 foot max run
- Rated IP54 - Unjacketed
- 50,000 hours rated life

## Available CCT



RGBW

## Listing / Ratings




## TRULUX™ Spec Grade RGBW

Alternating 3-in-1 LEDs with 3000K warm white LEDs provide a dynamic color range that extends past traditional RGB. RGBW lighting combines RGB with white color mixing to create millions of color possibilities while maintaining even greater brightness and overall color saturation.

## Technical Information

Series	SPTL-RGBW
Input Voltage	24V DC
CCT	RGBW
CRI	90+
Wattage	7W per foot
Lumens	Up to 350lm per foot
Max Run	16.4ft
Cuttable	Every 2.46in (62.5mm)
IP Rating	IP54 - Unjacketed
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

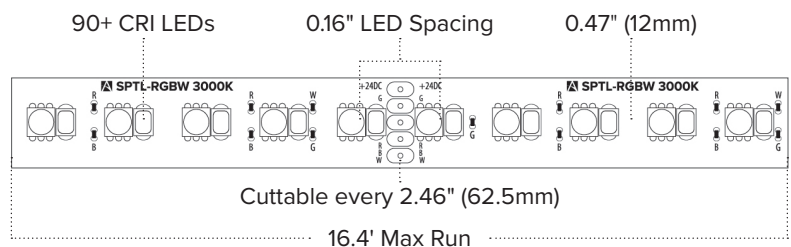



**HTL-TWR SERIES ORDERING INFORMATION**

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
<b>SPTL-RGBW</b>	24V DC	RGBW	16.4ft	350Lm/ft	7W/ft	IP54	90+	2.46" (62.5mm)

SPTL-RGBW (IP54) 16.4ft Reels include: Attached 3' Lead Wires | (5) TL-5PWR-HD

**RGBW ACCESSORIES**


ITEM NUMBER	DESCRIPTION
<b>TL-5PWR-HD</b>	6' HD Power Feed
<b>TL-5SPL-HD</b>	HD Tape to Tape Splice Connector
<b>TL-5JUMP6-HD</b>	6" HD Linking Cable
<b>TL-5JUMP24-HD</b>	24" HD Linking Cable
<b>WIRE-15-5PIN</b>	15ft (20/5) Wire Spool
<b>WIRE-CMP-100-6PIN</b>	100' (16/6) In-wall Rated Wire Spool
<b>INLINE-RGBW-CTRL</b>	Simple Select RGBW Controller
<b>SPKPL-REC-TB-5CH</b>	Spektrum+™ Smart Receiver (App Controlled)
<b>RCWY-PVC-1M</b>	1m Plastic Wire Cover Raceway




**Building an RGBW Trulux™ System?**

See pages (115-118) for compatible RGBW controllers & accessories

**Smart Receiver Set-up**

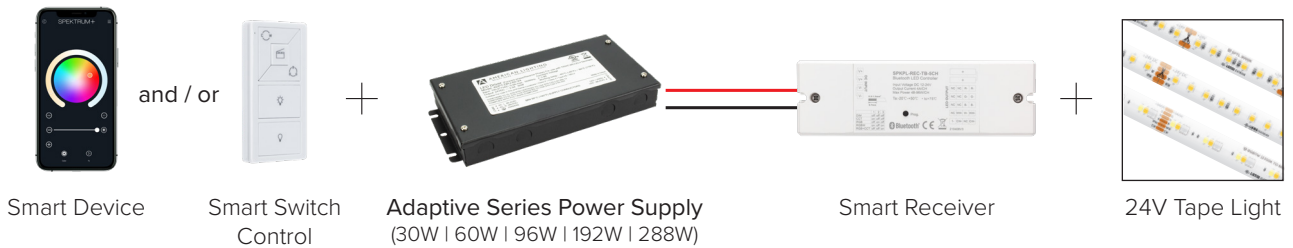

**DMX Color Changing Set-up**

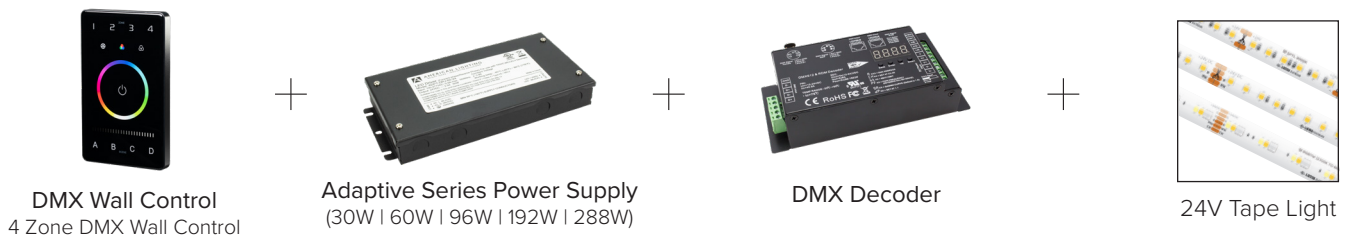

**Wireless DMX Color Changing Set-up**

